


# SolarEdge Inverter Installation Guide, Erratum

This erratum should be used with the *SolarEdge Installation Guide, Version 3.3* (P/N MAN-01-00002-3.3).

- The following power optimizer drawing replaces Figure 6 on page 19:

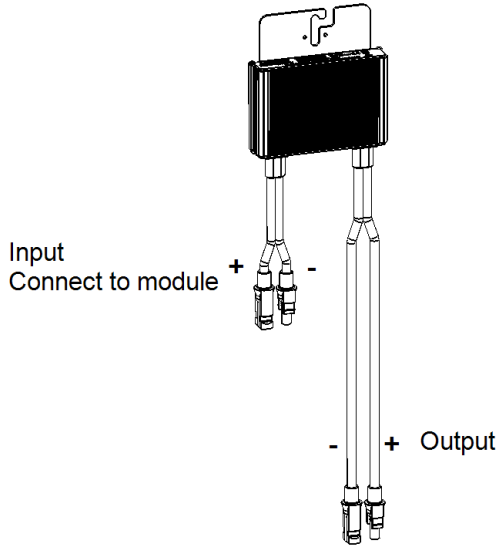

- The following Safety Switch specifications table replaces the Safety Switch table on page 101:

## Safety Switch Specifications

Specifications	Single Phase 3-7.6 kW	Single Phase 10 – 11.4 kW	Three Phase	Unit
Maximum DC voltage	600	500		Vdc
Maximum DC current	32	40	32	Adc
Maximum AC voltage	208/240		208/480	Vac
Maximum AC current	32	50	32	Aac
Ambient temperature	-40 to 149 / -40 to +65		-40 to 140 / -40 to +60 °F / °C	
Weight	5.29 / 2.4		6.6 / 3.0 lb/kg	