

Power Optimiser For Australia

S1400



POWER OPTIMISERS

SolarEdge's most powerful and cost-effective Power Optimiser for commercial and large field installations

Greater Energy Yields

- High efficiency (99.5%) with panel-level MPPT, for maximised system energy production and revenue, and fast project ROI
- Supports up to 700W high power and 20A high current panels, including bifacial and G12 panels

Maximum Protection with Built-In Safety

- Designed to automatically reduce high DC voltage to touch-safe levels upon grid/inverter shutdown, with SafeDC™
- Includes SolarEdge Sense Connect, for connector-level monitoring during production to detect overheating due to installation issues

Lower BoS Costs with Flexible Design

- More power with up to 30.4 kW per string for optimal usage of the installation area, enabling up to 2x longer and fewer strings, 50% fewer cables, fuses, and combiner boxes
- Compact size and slimmer profile for simple cost-effective installations, especially in challenging spaces
- Connects to two PV panels in a series

Simpler O&M

- Panel-level system monitoring enabling pinpointed fault detection
- Remote, time-saving troubleshooting for fewer truck rolls and time on site

/ Power Optimiser

For Australia

S1400

		S1400	Unit
INPUT			
Rated Input DC Power ⁽¹⁾		1400	W
Absolute Maximum Input Voltage (Voc)		125	Vdc
MPPT Operating Range		12.5 – 105	Vdc
Maximum Short Circuit Current (Isc) of Connected PV Panel ⁽²⁾		20	Adc
Maximum Efficiency		99.5	%
Weighted Efficiency		98.8	%
Overvoltage Category		II	
Overcurrent Protection		20.75	
OUTPUT DURING OPERATION			
Maximum Output Current		24	Adc
Maximum Output Voltage		80	Vdc
OUTPUT DURING STANDBY (POWER OPTIMISER DISCONNECTED FROM INVERTER OR INVERTER OFF)			
Safety Output Voltage per Power Optimiser		1±0.1	Vdc
STANDARD COMPLIANCE			
EMC		FCC Part 15, IEC 61000-6-2, and IEC 61000-6-3 - Class B, EN 55011	
Safety		IEC 62109-1 (class II safety)	
Material		UL94 V-0, UV Resistant	
RoHS		Yes	
Fire Safety		VDE-AR-E 2100-712:2013-05	
INSTALLATION SPECIFICATIONS			
Compatible SolarEdge Inverters		All commercial three phase inverters	
Maximum Allowed System Voltage		1000	Vdc
Dimensions (W x L x H)		129 x 155 x 52	mm
Weight		1087	gr
Input Connector		MC4 ⁽³⁾	
Input Wire Length		Short Input Option: 0.1 Long Input Option: 1.8 ⁽⁴⁾	m
Output Connector		MC4	
Output Wire Length		(+) 5.7 (-) 0.10	m
Operating Temperature Range ⁽⁵⁾		-40 to +85	°C
Protection Rating		IP68 / NEMA6P	
Relative Humidity		0 – 100	%

(1) Rated power of the panel at STC will not exceed the Power Optimiser Rated Input DC Power. Panels with up to +5% power tolerance are allowed.


(2) When using bifacial panels, consider only the front side Isc at STC (0% back side gain). For details, see the [Compatibility of Bifacial Modules with SolarEdge Power Optimizers](#) application note.

(3) For other connector types please contact SolarEdge.

(4) For S-Series models with long input cables (1.8m), the Sense Connect feature is only enabled on the output cable connector.

(5) For ambient temperatures above +65°C power derating is applied.

S1400 Mechanical Drawing

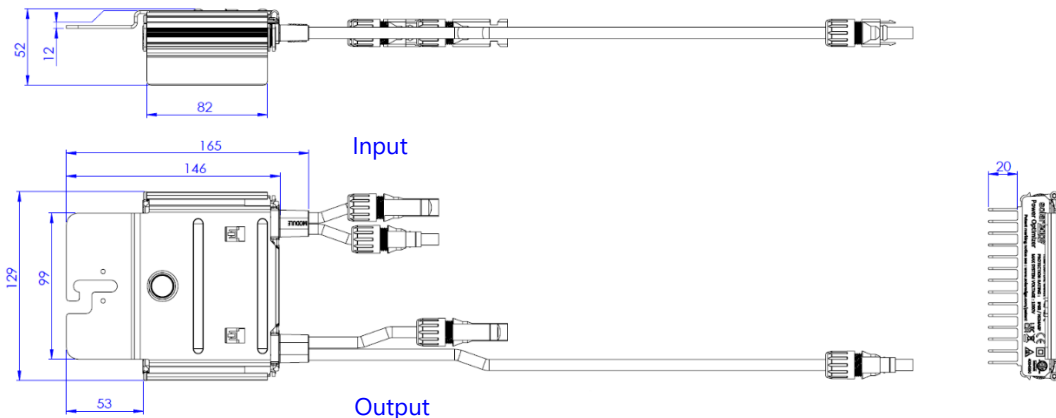

* When installing SolarEdge power optimisers, maintaining clearance is required. For details, see the [Power Optimiser Clearance](#) application note.

/ Power Optimiser

For Australia

S1400

PV System Design Using a SolarEdge Inverter ⁽⁶⁾⁽⁷⁾⁽⁸⁾⁽⁹⁾		230/400V Grid SE15K	230/400V Grid SE17K	230/400V Grid SE25K*	230/400V Grid SE27.6K*, SE30K*	230/400V Grid SE33.3K*	Units
Compatible Power Optimizers		S1400					
Minimum String Length	Power Optimisers	14	14	14	14	14	
	PV Panels	27	27	27	27	27	
Maximum String Length	Power Optimisers	30	30	30	30	30	
	PV Panels	60	60	60	60	60	
Maximum Continuous Power per String		18,600	18,000	18,000	18,600	18,000	
Maximum Allowed Connected Power per String ⁽¹⁰⁾		1 string or more – 28,600	1 string or more – 28,000	1 string – 20,250 2 strings or more – 28,000	1 string – 20,850 2 strings or more – 28,600	1 string – 20,250 2 strings or more – 28,000	W
Parallel Strings of Different Lengths or Orientations		Yes					
Maximum Difference in Number of Power Optimisers Allowed Between the Shortest and Longest String Connected to the Same Inverter Unit		5 Power Optimizers					

* The same rules apply for Synergy units of equivalent power ratings, that are part of the modular Synergy Technology inverter.

(6) S1400 cannot be mixed with any other Power Optimisers models in the same string.

(7) For each string, a Power Optimiser may be connected to a single PV panel if:

- 1) each Power Optimiser is connected to a single PV panel or
- 2) it is the only Power Optimiser connected to a single PV panel in the string.

(8) For SE15K and above, the minimum STC DC connected power should be 11KW.

(9) When connecting to inverters that support Rapid Shutdown, each string must contain fewer than 28 power optimizers to meet NEC Rapid Shutdown requirements.

(10) To connect more STC power per string, design your project using [SolarEdge Designer](#).