

Faster Charging Comes Home





SolarEdge Home EV Charger

Quick Installation Guide












This guide will help you installing and setting up your SolarEdge Home EV Charger

Package Contents

-  EV charger cable
-  Wall - mounted bracket
-  SolarEdge Home EV Charger
-  Cable lock

Required Equipment

-  Pencil
-  Level
-  Screwdriver 4 mm
-  Allen key
-  Smartphone
-  Stud finder
-  Drill
-  3-5 Screws
-  3-5 Wall anchors




ENERGY STAR® certified SolarEdge Home EV Charger




Scan QR code for installation video

solaredge

/ INSTALLING

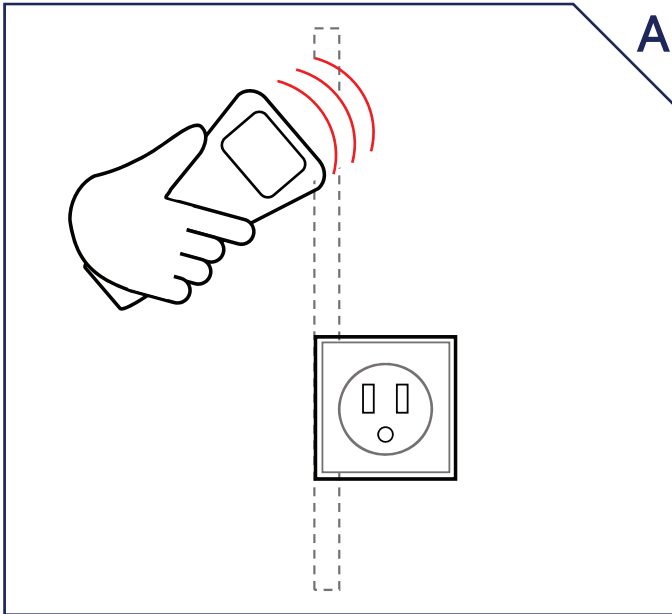


Use a stud finder to locate studs around the power outlet

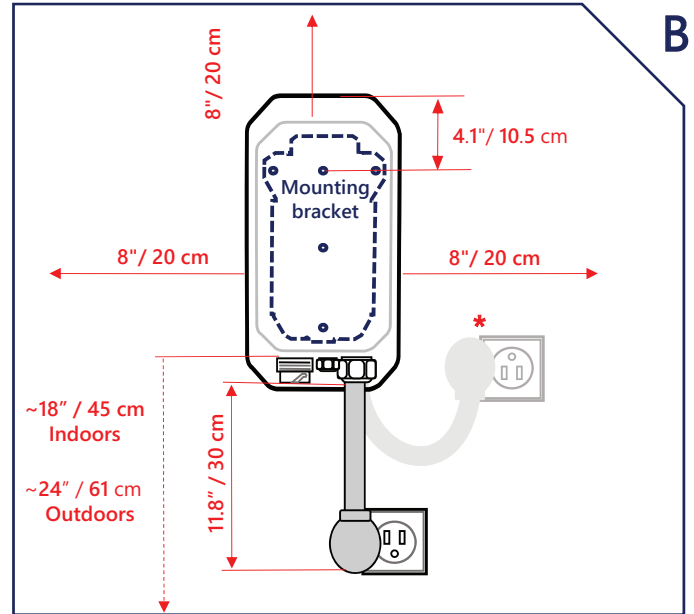


Dimensions: 30.5 cm (H) X 19 cm (W) X 15.4 cm (D) 12" (H) X 7.5" (W) X 6" (D)




* If the socket is installed upside down, move the Smart EV Charger closer to the power outlet, loop the lead and plug-in

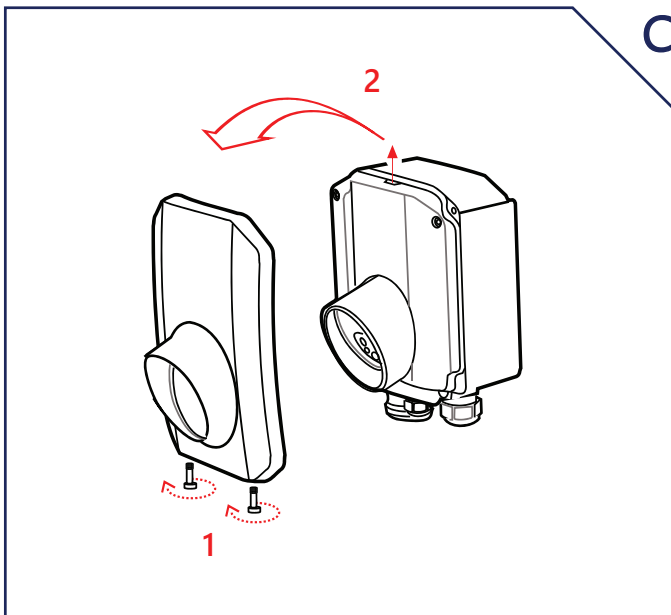

1. Release the two bolts connecting the front cover
2. Remove the front cover from the EV charger

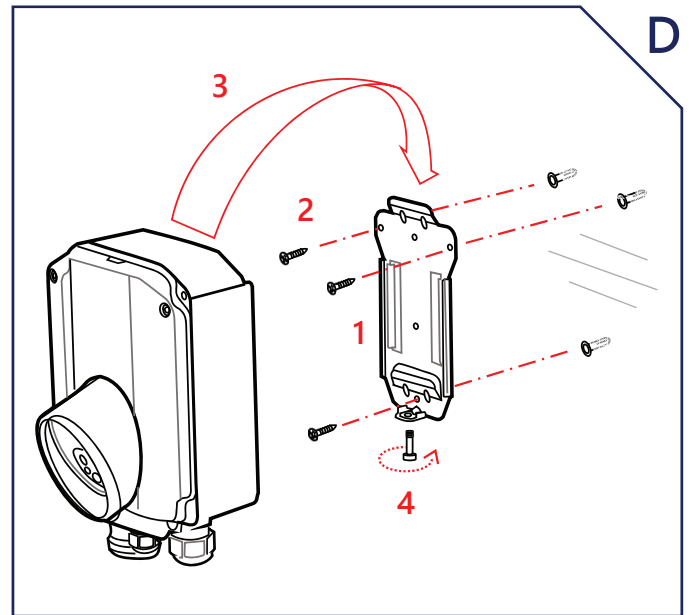

1. Level the bracket on the wall and use it as a template for marking holes. Drill holes in the shown locations (use more holes for greater stability). Insert the wall anchors to the holes. If studs are used, use screws that penetrate studs
2. Fasten the bracket to the wall with screws
3. Slide the EV charger down over the bracket
4. Secure the bolt

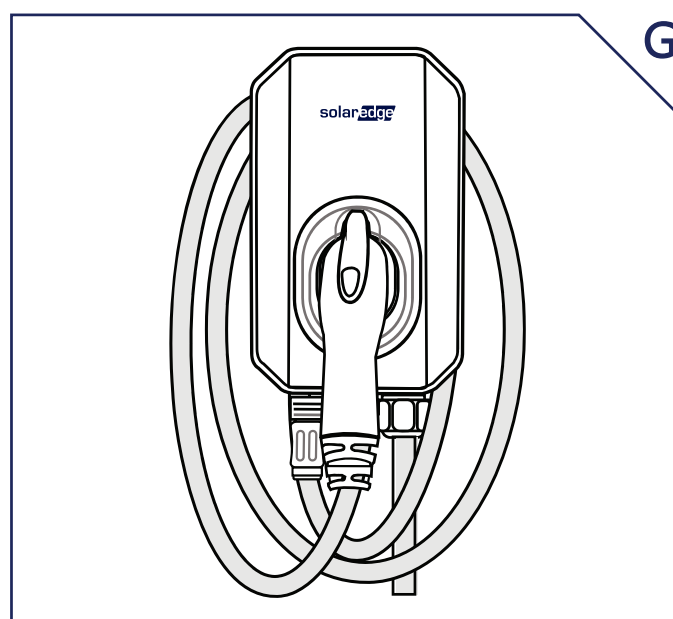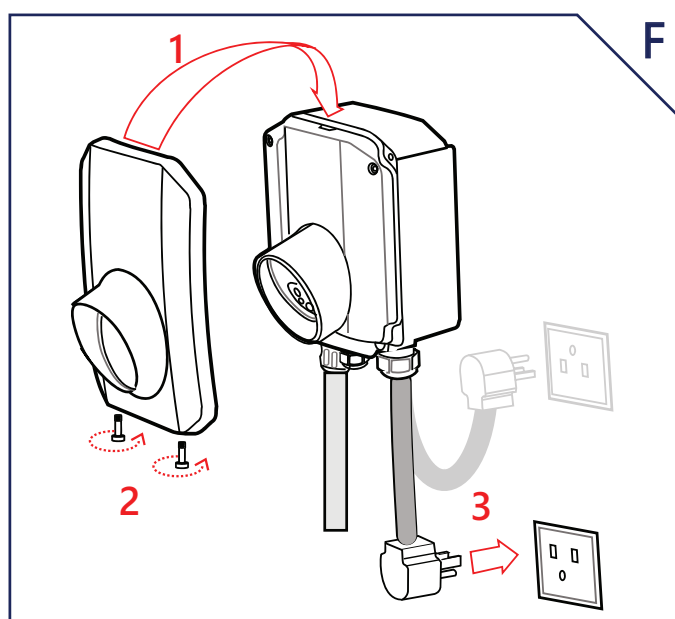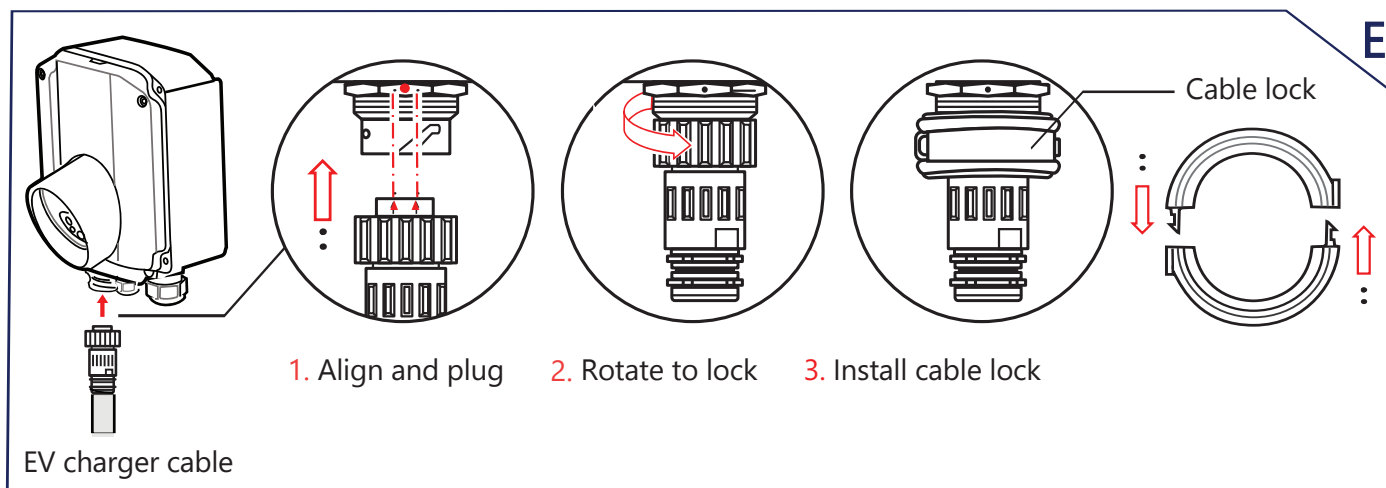


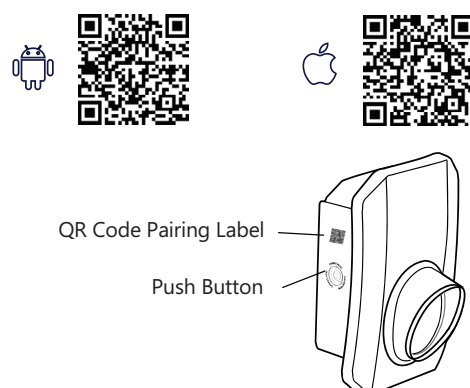
/ SETTING UP

mySolarEdge is an app used for scheduling charging and monitoring status of the EV charger through the Internet.

The EV charger, can be paired directly with a smartphone and set over Wi-Fi (no internet is required).


To start charging:

1. Scan the QR code to download mySolarEdge to your smartphone
2. Start  mySolarEdge and follow the on-screen instructions
3. Long press the Push Button
4. Scan the QR Code Pairing Label for setting up the EV charger



/ CHARGING

Plug the EV charger cable into the vehicle charging port. The LED Ring Indicator will illuminate orange, indicating that charging is in progress. Once charging is complete, press the Lock Release Button, remove the cable from your vehicle and wind the cable around the EV charger.

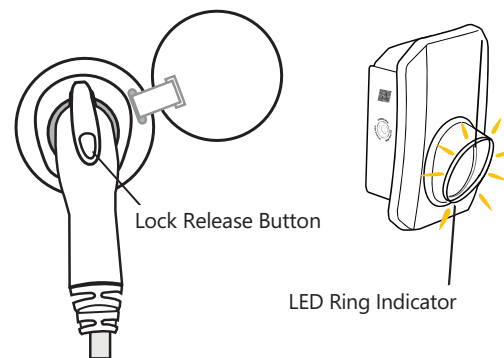

Push Button Functions

- | | |
|-------------|---|
| Short press | <ul style="list-style-type: none">• Start charging immediately, even if the EV charger is in scheduling mode• Quickly restart the EV charger in case of an error |
| Long press | Turns on the Wi-Fi to enable pairing with a smartphone (refer to mySolarEdge) |

LED Ring Indications

Color	Description
OFF	No power
Red ON	Error
Green ON	Charging and connected to Internet
Green blinking	Connected to EV and connected to Internet
Green pulsating ⁽¹⁾	Not connected to EV but connected to Internet
Orange ON	Charging but not connected to Internet
Orange blinking	Connected to EV but not connected to Internet
Orange pulsating ⁽¹⁾	Not connected to EV and not connected to Internet
Purple blinking fast	EV charger is ready to connect to smartphone for setting up
Purple momentarily ON	EV charger is connected to smartphone for setting up

⁽¹⁾The light switches on slowly and gradually increases up to maximum and then slowly decreases back to off

Buzzer Indications

Indication	Description
1 short beep	Connected to EV
2 short beeps + 1 long beep	Charging starts
5 short beeps	Error



Scan QR code for installation manual



YOU'RE ALL SET FOR EV CHARGING!

About SolarEdge

SolarEdge is a global leader in smart energy technology. By deploying world-class engineering capabilities and a relentless focus on innovation, we create smart energy products and solutions that power our lives and drive future progress



SolarEdge
 @SolarEdgePV
 @SolarEdgePV
 SolarEdgePV
 SolarEdge
 info@solaredge.com

solaredge

solaredge.com

© SolarEdge Technologies, Ltd.
All rights reserved.
Rv: 08/2022/V02/ENG NA.
Subject to change without notice.